

ALUMINIUM INSULATED SH2 THERMO DOOR (SH2T)

Door size up to: 3000x2600 mm



SH2T S+V



SH2T P+V



SH2T P



Thermal transmittance

SH2T P 3000x2600 mm

~1.2 W/m²K



Wind resistance

PN-EN12210:2016

Class C3



Rain resistance

PN-EN12208:2001

Class 6A

STANDARD OPTIONS

- Double clear safety glazing/matt (max height 520 mm)
- Hinges and handle (standard colours: white, black, silver)
- 1 – point lock
- Integrated shoot – bolts
- Door stays
- Door model SH2T P+V and SH2T P filling inside, stucco embossed RAL9002
- Door model SH2T S+V filling inside smooth, same as door colour

ADDITIONAL OPTIONS

- 3-point lock
- “Stabilus” gas door stays
- Integrated espagnolette
- Custom colour hinges and handle
- Custom sand blasted glazing

STANDARD COLOURS (RAL)




9016

9006


7016

9004

FRAME PROFILE CROSS – CUT VIEW

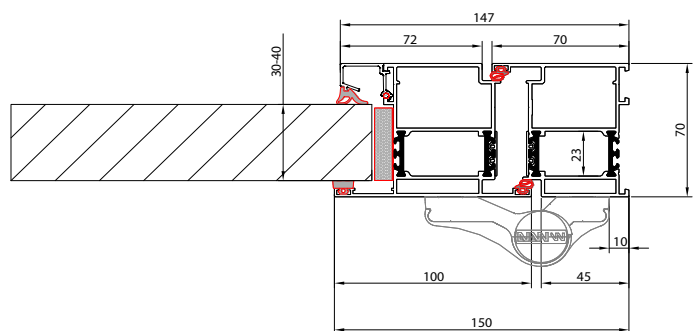

FRAME PROFILE CROSS – CUT VIEW

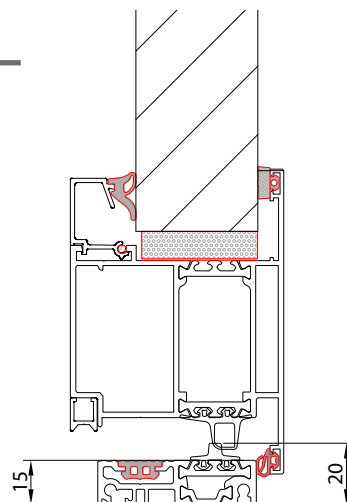

ACCESSORIES



Standart handle



Hinge bolts



Integrated espagnolette



"Stabilus" gas door stays



Standart hinges adjustable in 3 directions



Door stays



Integrated shoot – bolts

